


VIEW A:
MOUNTING FOOT DETAIL

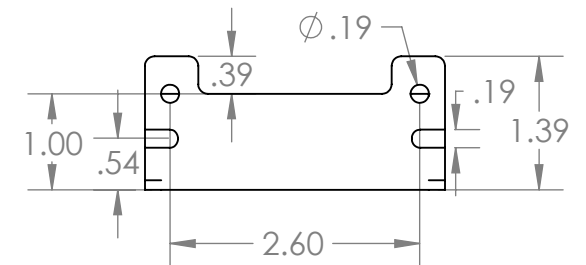

AC UNIDIRECTIONAL GEARMOTOR

A - OUTPUT SHAFT DIAMETER & LENGTH PER CUSTOMER REQUIREMENTS
 B - .5/8" - 2" DEPENDING UPON RPM & TORQUE REQUIREMENTS

- OUTPUT SPEEDS FROM 1-800 RPM
- OUTPUT TORQUE TO 50 IN. LB
- CONTINUOUS OR INTERMITTANT DUTY
- SELF-RESETTING THERMAL PROTECTION
- U.L. & C.S.A. APPROVED
- C.E. MARKED
- 18 GAUGE LEADS

OPTIONS:

- 2.5" DIA. PLASTIC COOLING FAN
- HEAVY DUTY NEEDLE BEARINGS
- FRICTION BRAKES
- TERMINALS
- ONE WAY CLUTCH

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	REX ENGINEERING GEARMOTORS			
DIMENSIONS ARE IN INCHES		DRAWN	RPH	7/17/17	TITLE:		
TOLERANCES:		CHECKED					
FRACTIONAL \pm		ENG APPR.					
ANGULAR: MACH \pm BEND \pm		MFG APPR.					
TWO PLACE DECIMAL $\pm .02$		Q.A.			SIZE	DWG. NO.	REV
THREE PLACE DECIMAL $\pm .005$		COMMENTS:		A		CD	
INTERPRET GEOMETRIC TOLERANCING PER:		SP 1.5"		SCALE: 1:2		WEIGHT:	SHEET 1 OF 1
MATERIAL							
FINISH							
DO NOT SCALE DRAWING							