
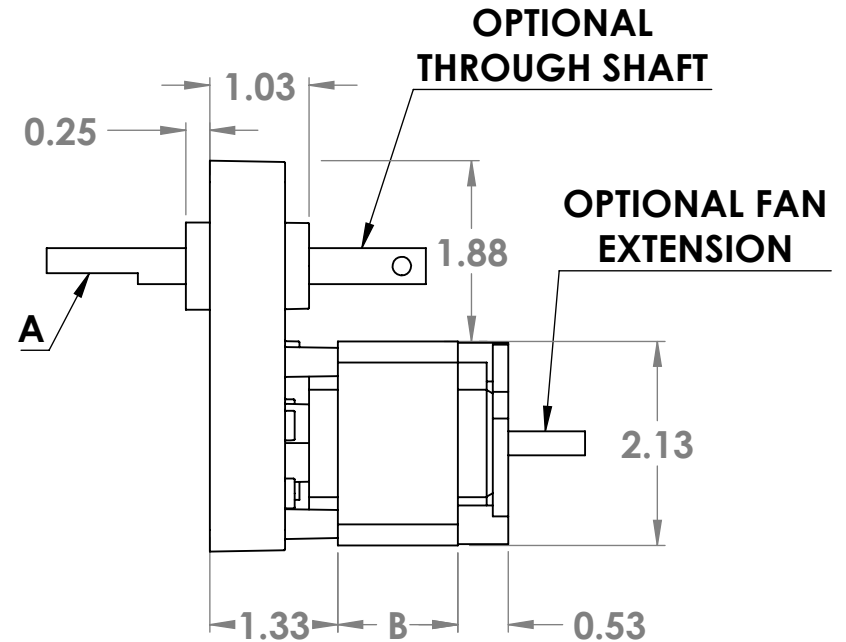


**4 MOUNTING BOSSSES
TAPPED 8-32**

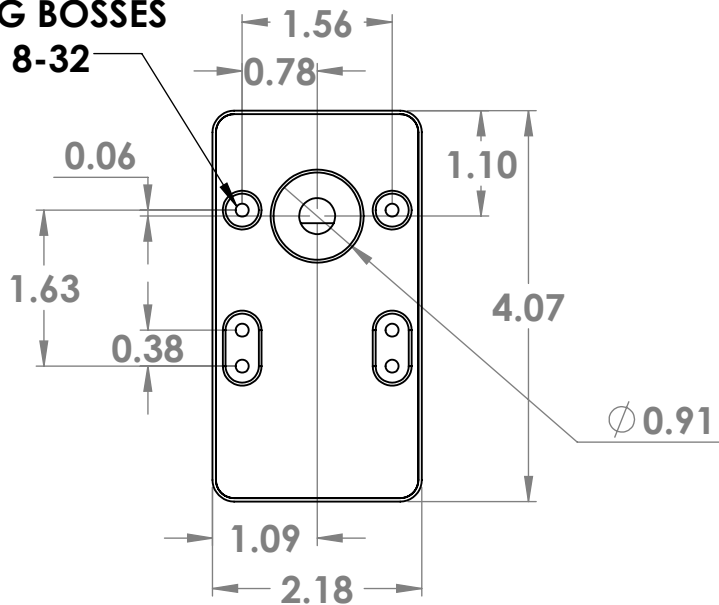

AC REVERSIBLE GEARMOTOR

A - OUTPUT SHAFT DESIGN PER CUSTOMER REQUIREMENTS

B - 5/8"-2" DEPENDING ON RPM & TORQUE REQUIREMENTS

OUTPUT SPEEDS FROM 1-800 RPM

OUTPUT TORQUE TO 100 IN. LB.

24/120/240 VAC, 50/60 HZ

**CONTINUOUS OR INTERMITTANT DUTY
SELF-RESETTING THERMAL PROTECTION**

U.L. & C.S.A APPROVED, C.E. MARKED

**3 WIRE, PERMANENT SPLIT CAPACITOR
CONSTRUCTION**

18 GAUGE LEADS, LENGTH AS REQUIRED

OPTIONS

HIGH TEMPERATURE PLASTIC FAN

HEAVY DUTY NEEDLE BEARINGS

ADJUSTABLE CAMS & LIMIT SWITCHES

CAPACITOR

FRICTION BRAKES

TERMINALS

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	REX ENGINEERING	
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		DRAWN	RPH 4/18		
INTERPRET GEOMETRIC TOLERANCING PER:		CHECKED		SIZE DWG. NO. REV	
MATERIAL		ENG APPR.			
FINISH		MFG APPR.		SCALE: 2:3 WEIGHT: SHEET 1 OF 1	
DO NOT SCALE DRAWING		Q.A.			
		COMMENTS:			